

# Slim CCT

SLIM CCT Ceiling Light 25W  
900x70x27mm IP20

Cod: **6361452**



IP20  
Protected from solid bodies larger  
than 12 mm



II  
Protection class II



CRI >80  
Colour rendering index >80



Variable CCT  
Selectable colour temperature



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Linear fixture with an ultra-slim design (only 27 mm thick), engineered to blend discreetly into offices, corridors, or residential spaces (IP20 rating). It delivers 25W of power across its 90 cm length and features CCT technology for adjusting the light tone.

### Lighting data

|                          |      |
|--------------------------|------|
| Source type              | SMD  |
| MacAdam (SDCM)           | < 1  |
| Ignition time            |      |
| Color temperature (CCT)  |      |
| Color render index (CRI) | > 80 |
| MacAdam (SDCM)           | < 6  |
| Lumen output (lm)        |      |

|                         |                         |
|-------------------------|-------------------------|
| Beam angle              |                         |
| Photobiological risk    | Risk Group 1 (Low Risk) |
| LED Lifetime            |                         |
| Energy efficiency class |                         |

### Mechanical data

|             |       |
|-------------|-------|
| Width (mm)  |       |
| Length (mm) |       |
| Height (mm) |       |
| Weight (g)  |       |
| IP rating   | IP 20 |
| IK rating   |       |


|                             |               |
|-----------------------------|---------------|
| Finishing colour            | White RAL9003 |
| Body material               |               |
| Diffuser material           |               |
| Maximal working temperature |               |
| Minimal working temperature | -20° C        |

### Electrical data

|                   |              |
|-------------------|--------------|
| Nominal power (W) | 25           |
| Power factor      | > 0,9        |
| Power supply      | 230V 50/60Hz |
| Ballast           | Integrated   |
| Insulation class  | II           |

|                           |    |
|---------------------------|----|
| Dimmable                  | No |
| Quantity per package      | 1  |
| Total quantity per boxing |    |

## Photometry

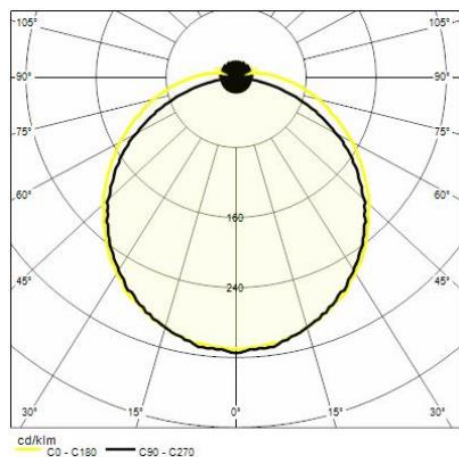

## Technical drawing

