



Elmo

ELMO WALL LIGHT 10W 4000K IP54
BLACK

Cod: **MES0003**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >90
Colour rendering index >90



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: MES0003 | Category: Outdoor luminaires | Model: Elmo | Product description: ELMO WALL LIGHT 10W 4000K IP54 BLACK | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 6 | Lumen output (lm): 570 | Beam angle: 176° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Width (mm): 100 | Length (mm): 100 | Height (mm): 120 | Weight (g): 950 | IP rating: IP 54 | Finishing colour: Black RAL9005 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 10 | Power factor: > 0,98 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K
Color render index (CRI)	> 90, > 90
MacAdam (SDCM)	< 6
Lumen output (lm)	570
Beam angle	176°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	50.000 h

Mechanical data

Width (mm)	100
Length (mm)	100
Height (mm)	120
Weight (g)	950
IP rating	IP 54
Finishing colour	Black RAL9005, Black RAL9005


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	PMMA (polymethyl methacrylate)
Maximal working temperature	+50° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	10
Power factor	> 0,98
Power supply	220/240V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I

Dimmable	No
Quantity per package	1
Total quantity per boxing	12

Photometry

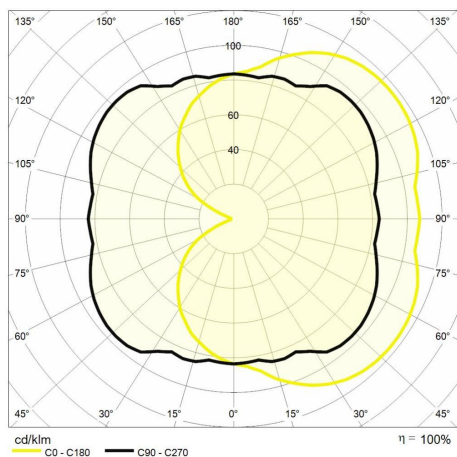

Technical drawing

