



Accento 8W

ACCENTO 8W 3000K 30° IP65 220-240V

Cod: **MES0232**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MES0232 | Category: Outdoor luminaires | Model: Accento 8W | Product description: ACCENTO 8W 3000K 30° IP65 220-240V | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 4 | Lumen output (lm): 516 | Beam angle: 30° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 55 | Height (mm): 118 | Weight (g): 400 | IP rating: IP 65 | Finishing colour: Black RAL9005 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Glass | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 8 | Power factor: > 0,8 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No | Power cable length: 1,5 |

Lighting data

Color temperature (CCT)	3000K
Color render index (CRI)	> 80, > 80
MacAdam (SDCM)	< 4
Lumen output (lm)	516
Beam angle	30°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	25.000 h

Mechanical data

Diameter (mm)	55
Height (mm)	118
Weight (g)	400
IP rating	IP 65
Finishing colour	Black RAL9005, Black RAL9005


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	Glass
Maximal working temperature	+35° C
Minimal working temperature	-25° C

Electrical data


Nominal power (W)	8
Power factor	> 0,8, > 0,8
Power supply	220/240V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	I, I
Dimmable	No

Power cable length	1,5
Quantity per package	1
Total quantity per boxing	16

Photometry

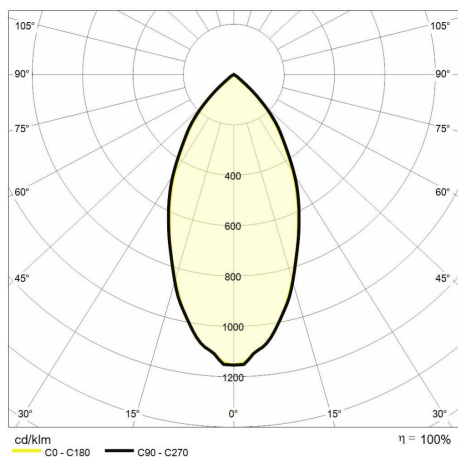

Technical drawing

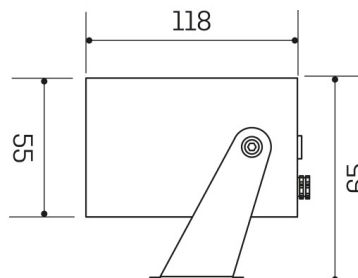

Accessories



Accento pickets

STAKE for ACCENTO 8W

Cod: MES0239