


# Geppetto

GEPPETTO 1W 36° 3000K IP20 white KIT  
3PCS

Cod: **MIC0013**



IP20  
Protected from solid bodies larger than 12 mm



III  
Protection class III



CRI >80  
Colour rendering index >80



CAM compliant  
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MIC0013 | Category: Indoor luminaires | Model: Geppetto | Product description: GEPPETTO 1W 36° 3000K IP20 white KIT 3PCS | Source type: COB | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 3 | Lumen output (lm): 130 | Beam angle: 36° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 30 | Height (mm): 13,85 | Recess hole (mm): Ø 26 | Weight (g): 15 | IP rating: IP 20 | Finishing colour: White | Type of finishing: Polyester powder coated | Body material: Steel | Diffuser material: PC (polycarbonate) | Maximal working temperature: +0° C | Minimal working temperature: +35° C | Nominal power (W): 1 | Power supply: 8,5V 350 mA | Ballast: Not included | Insulation class: III | Dimmable: No |

## Lighting data

|                          |            |                      |                                |
|--------------------------|------------|----------------------|--------------------------------|
| Source type              | COB, COB   | Beam angle           | 36°                            |
| Color temperature (CCT)  | 3000K      | Photobiological risk | RG1 (low risk), RG1 (low risk) |
| Color render index (CRI) | > 80, > 80 | LED Lifetime         | 50.000 h                       |
| MacAdam (SDCM)           | < 3, < 3   |                      |                                |
| Lumen output (lm)        | 130        |                      |                                |


## Mechanical data

|                  |       |                                |                                                     |
|------------------|-------|--------------------------------|-----------------------------------------------------|
| Diameter (mm)    | 30    | Type of finishing              | Polyester powder coated,<br>Polyester powder coated |
| Height (mm)      | 13,85 | Body material                  | Steel                                               |
| Recess hole (mm) | Ø 26  | Diffuser material              | PC (polycarbonate)                                  |
| Weight (g)       | 15    | Maximal working<br>temperature | +35° C                                              |
| IP rating        | IP 20 | Minimal working temperature    | +0° C                                               |
| Finishing colour | White |                                |                                                     |


## Electrical data

|                   |              |                           |   |
|-------------------|--------------|---------------------------|---|
| Nominal power (W) | 1            | Quantity per package      | 1 |
| Power supply      | 8,5V 350 mA  | Total quantity per boxing | 0 |
| Ballast           | Not included |                           |   |
| Insulation class  | III          |                           |   |
| Dimmable          | No           |                           |   |

## Photometry

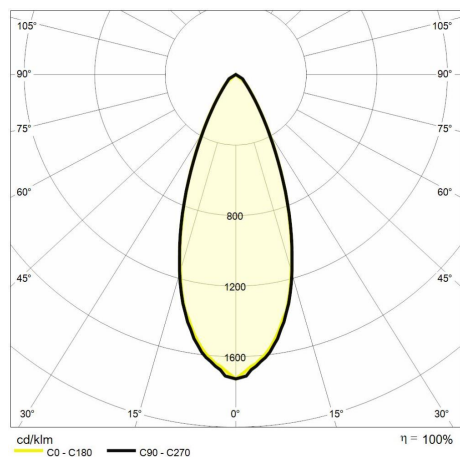

## Technical drawing

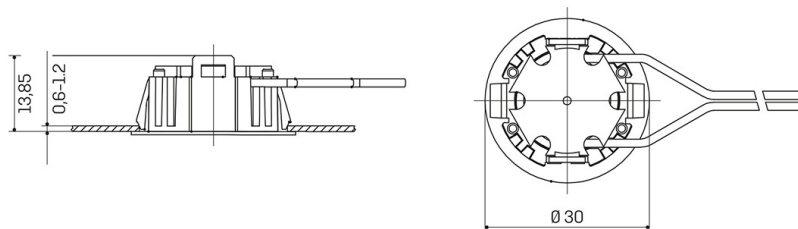

## Accessories



### Caleido power supply

LED POWER SUPPLY 4W 350MA  
CONSTANT CURRENT 2-11,5V  
Cod: MID0002