

Chef 172mm

CHEF 16W 4000K IP54 White

Cod: **MIC0022**



IP20 / IP54

Protected against dust and splashes (only in the lower part of the product)



II

Protection class II



CRI >80

Colour rendering index >80



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0022 | Category: Indoor luminaires | Model: Chef 172mm | Product description: CHEF 16W 4000K IP54 White | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 3 | Lumen output (lm): 1800 | Beam angle: 100° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Diameter (mm): 172 | Height (mm): 38 | Recess hole (mm): Ø 150 | Weight (g): 450 | IP rating: IP 20 / IP 54 (front) | Finishing colour: White | Body material: Die-cast aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 16 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Included | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K	Photobiological risk	RG0 (exempt)
Color render index (CRI)	> 80, > 80	LED Lifetime	50.000 h
MacAdam (SDCM)	< 3, < 3		
Lumen output (lm)	1800		
Beam angle	100°		


Mechanical data

Diameter (mm)	172	Finishing colour	White
Height (mm)	38	Body material	Die-cast aluminum, Die-cast aluminum
Recess hole (mm)	Ø 150	Diffuser material	PC (polycarbonate)
Weight (g)	450	Maximal working temperature	-40° C
IP rating	IP 20 / IP 54 (front), IP 20 / IP 54 (front)	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	16	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	220/240V 50/60Hz	Total quantity per boxing	20
Ballast	Included, Included		
Insulation class	II		

Photometry

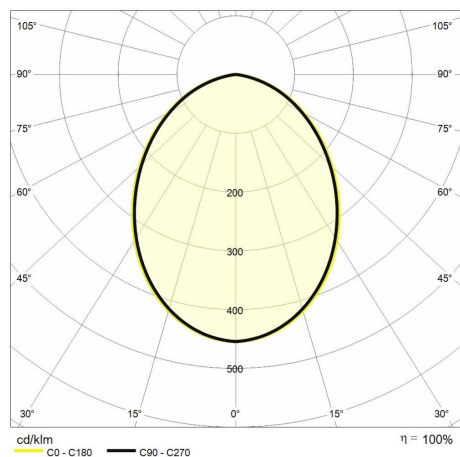

Technical drawing

