



Fascinum 3,2W

FASCINUM 3,2W 3000K 27 White

Cod: **MIC0032**



IP20

Protected from solid bodies larger than 12 mm



III

Protection class III



CRI >90

Colour rendering index >90



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0032 | Category: Indoor luminaires | Model: Fascinum 3,2W | Product description: FASCINUM 3,2W 3000K 27 White | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 353 | Beam angle: 27° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 54 | Height (mm): 84 | Recess hole (mm): Ø 49 | Weight (g): 150 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 3,2 | Power supply: 8,5V 350 mA | Ballast: Not included | Insulation class: III |

Lighting data

Color temperature (CCT)	3000K
Color render index (CRI)	> 90, > 90
MacAdam (SDCM)	< 3, < 3
Lumen output (lm)	353
Beam angle	27°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	25.000 h

Mechanical data

Diameter (mm)	54
Height (mm)	84
Recess hole (mm)	Ø 49
Weight (g)	150
IP rating	IP 20
Finishing colour	White RAL9003, White RAL9003


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	PMMA (polymethyl methacrylate)
Maximal working temperature	+35° C
Minimal working temperature	-25° C

Electrical data


Nominal power (W)	3,2
Power supply	8,5V 350 mA
Ballast	Not included
Insulation class	III

Quantity per package	1
Total quantity per boxing	50

Photometry

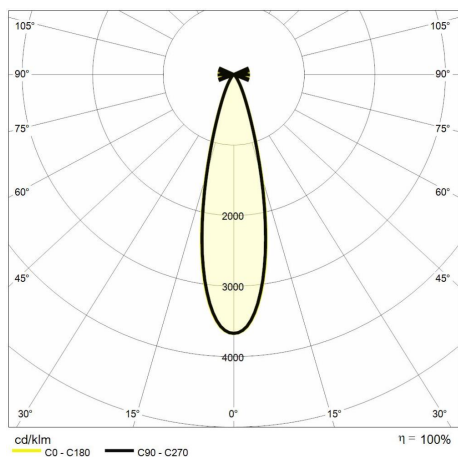

Technical drawing



Accessories



Caleido power supply

LED POWER SUPPLY 4W 350MA
CONSTANT CURRENT 2-11,5V
Cod: MID0002