



Globe 8,5W

GLOBO 8,5W 3000K 24° White RAL9003

Cod: **MIC0038**



IP20

Protected from solid bodies larger than 12 mm



II

Protection class II



CRI >90

Colour rendering index >90



CAM compliant

CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0038 | Category: Indoor luminaires | Model: Globe 8,5W | Product description: GLOBE 8,5W 3000K 24° White RAL9003 | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 525 | Beam angle: 24° | Photobiological risk: RG2 (moderate risk) | LED Lifetime: 50.000 h | Diameter (mm): 83 | Height (mm): 81 | Recess hole (mm): Ø 75 | Weight (g): 200 | IP rating: IP 20 | Finishing colour: White RAL9003 | Body material: Aluminum and PC | Maximal working temperature: -25° C | Minimal working temperature: +50° C | Nominal power (W): 8,5 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz 200mA | Ballast: Included | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	3000K	Photobiological risk	RG2 (moderate risk)
Color render index (CRI)	> 90, > 90	LED Lifetime	50.000 h
MacAdam (SDCM)	< 3, < 3		
Lumen output (lm)	525		
Beam angle	24°		


Mechanical data

Diameter (mm)	83	Finishing colour	White RAL9003, White RAL9003
Height (mm)	81	Body material	Aluminum and PC
Recess hole (mm)	Ø 75	Maximal working temperature	+50° C
Weight (g)	200	Minimal working temperature	-25° C
IP rating	IP 20		

Electrical data

Nominal power (W)	8,5	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	220/240V 50/60Hz 200mA	Total quantity per boxing	24
Ballast	Included, Included		
Insulation class	II		

Photometry

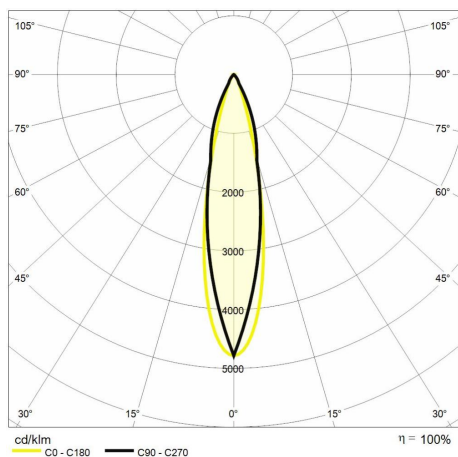

Technical drawing

