



Fascinum 10,7W

FASCINUM 10,7W 4000K 21 White

Cod: **MIC0042**



IP20

Protected from solid bodies larger than 12 mm



III

Protection class III



CRI >90

Colour rendering index >90



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0042 | Category: Indoor luminaires | Model: Fascinum 10,7W | Product description: FASCINUM 10,7W 4000K 21 White | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1211 | Beam angle: 21° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 90 | Height (mm): 126 | Recess hole (mm): Ø 82 | Weight (g): 450 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 10,7 | Power supply: 36V 300 mA | Ballast: Not included | Insulation class: III |

Lighting data

Color temperature (CCT)	4000K
Color render index (CRI)	> 90, > 90
MacAdam (SDCM)	< 3, < 3
Lumen output (lm)	1211
Beam angle	21°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	25.000 h

Mechanical data

Diameter (mm)	90
Height (mm)	126
Recess hole (mm)	Ø 82
Weight (g)	450
IP rating	IP 20
Finishing colour	White RAL9003, White RAL9003


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	PMMA (polymethyl methacrylate)
Maximal working temperature	+35° C
Minimal working temperature	-25° C

Electrical data


Nominal power (W)	10,7
Power supply	36V 300 mA
Ballast	Not included
Insulation class	III

Quantity per package	1
Total quantity per boxing	24

Photometry

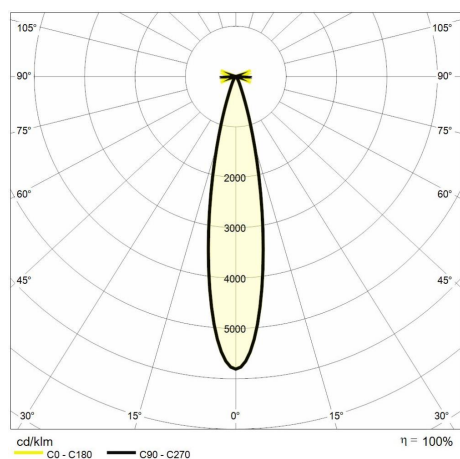

Technical drawing



Accessories



Fascinum power supply

LED POWER SUPPLY 2,5-15W 300MA
CONST,COR,2-41,5V
Cod: MID0014