



Globe 8,5W

GLOBO 8,5W 3000K 36° White RAL9003

Cod: **MIC0060**



IP20
Protected from solid bodies larger than 12 mm



II
Protection class II



CRI >90
Colour rendering index >90



CAM compliant
CAM (Minimum Environmental Criteria) compliant product for indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Adjustable, professional LED downlight designed for accent and general lighting. Different optics allow the light beam to be adjusted to suit the application. Ideal for offices, shops, and commercial spaces requiring high visual quality.

Lighting data

Color temperature (CCT)	3000K	Photobiological risk	RG2 (moderate risk)
Color render index (CRI)	> 90, > 90	LED Lifetime	50.000 h
MacAdam (SDCM)	< 3, < 3		
Lumen output (lm)	525		
Beam angle	36°		


Mechanical data

Diameter (mm)	83	Finishing colour	White RAL9003, White RAL9003
Height (mm)	81	Body material	Aluminum and PC
Recess hole (mm)	Ø 75	Maximal working temperature	+50° C
Weight (g)	200	Minimal working temperature	-25° C
IP rating	IP 20		

Electrical data

Nominal power (W)	8,5	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	220/240V 50/60Hz 200mA	Total quantity per boxing	24
Ballast	Included, Included		
Insulation class	II		

Photometry

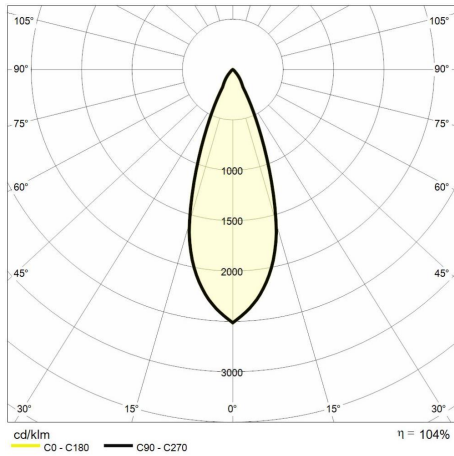

Technical drawing

