



Principe 140mm

PRINCIPE 13W 4000K 60° white
RAL9003

Cod: **MIC0087**



IP20 / IP54

Protected against dust and
splashes (only in the lower part of
the product)



II

Protection class II



CRI >90

Colour rendering index >90



CAM compliant

CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



Reer warranty

Reer guarantees the product for a
time duration of 3 years



Technical description

Product code: MIC0087 | Category: Indoor luminaires | Model: Principe 140mm | Product description: PRINCIPE 13W 4000K 60° white RAL9003 | Source type: COB | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1079 | Beam angle: 60° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 140 | Height (mm): 54 | Recess hole (mm): Ø 120 | Weight (g): 440 | IP rating: IP 20 / IP 54 (front) | Finishing colour: White RAL9003 | Body material: Die-cast aluminum | Diffuser material: Clear tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 13 | Power factor: > 0,5 | Power supply: 220/240V 50/60Hz 300mA | Ballast: Included | Insulation class: II | Dimmable: No |

Lighting data

Source type	COB, COB
Color temperature (CCT)	4000K
Color render index (CRI)	> 90, > 90
MacAdam (SDCM)	< 3, < 3
Lumen output (lm)	1079

Beam angle	60°, 60°
Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	50.000 h

Mechanical data

Diameter (mm)	140
Height (mm)	54
Recess hole (mm)	Ø 120
Weight (g)	440
IP rating	IP 20 / IP 54 (front), IP 20 / IP 54 (front)


Finishing colour	White RAL9003, White RAL9003
Body material	Die-cast aluminum, Die-cast aluminum
Diffuser material	Clear tempered glass
Maximal working temperature	+50° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	13
Power factor	> 0,5
Power supply	220/240V 50/60Hz 300mA
Ballast	Included, Included
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	36

Photometry

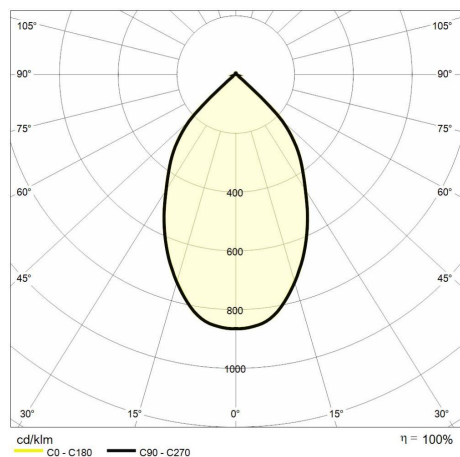

Technical drawing

