



Effetto 23W

EFFETTO 3000K 23W 60° White
(600mA)

Cod: **MTK0004**



IP20
Protected from solid bodies larger
than 12 mm



II
Protection class II



CRI >90
Colour rendering index >90



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: MTK0004 | Category: Indoor luminaires | Model: Effetto 23W | Product description: EFFETTO 3000K 23W 60° White (600mA) | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 2362 | Beam angle: 60° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 23 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	3000K	Photobiological risk	RG1 (low risk), RG1 (low risk)
Color render index (CRI)	> 90, > 90	LED Lifetime	50.000 h
MacAdam (SDCM)	< 3, < 3		
Lumen output (lm)	2362		
Beam angle	60°, 60°		


Mechanical data

Diameter (mm)	95	Type of finishing	Polyester powder coated, Polyester powder coated
Height (mm)	113	Body material	Aluminum, Aluminum
Weight (g)	1200	Diffuser material	Tempered glass
IP rating	IP 20	Maximal working temperature	+55° C
Finishing colour	White RAL9016	Minimal working temperature	-20° C

Electrical data

Nominal power (W)	23	Dimmable	No
Power factor	> 0,9	Quantity per package	1
Power supply	220/240V 50/60Hz	Total quantity per boxing	10
Ballast	Integrated, Integrated		
Insulation class	II		

Photometry

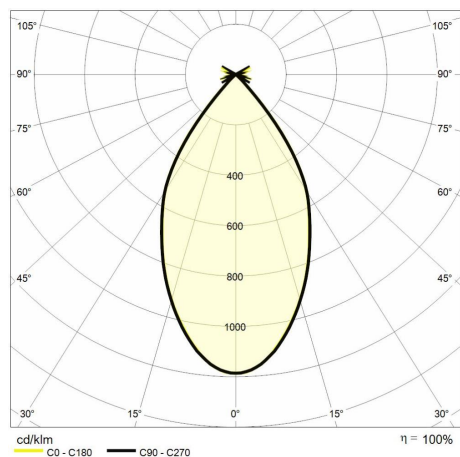

Technical drawing

