



Effetto 33W

EFFETTO 4000K 33W 60° White
(850mA)

Cod: **MTK0044**



IP20
Protected from solid bodies larger
than 12 mm



II
Protection class II



CRI >90
Colour rendering index >90



CAM compliant
CAM (Minimum Environmental
Criteria) compliant product for
indoor and outdoor installation



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: MTK0044 | Category: Indoor luminaires | Model: Effetto 33W | Product description: EFFETTO 4000K 33W 60° White (850mA) | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3384 | Beam angle: 60° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 33 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K
Color render index (CRI)	> 90, > 90
MacAdam (SDCM)	< 3, < 3
Lumen output (lm)	3384
Beam angle	60°, 60°

Photobiological risk	RG1 (low risk), RG1 (low risk)
LED Lifetime	50.000 h

Mechanical data

Diameter (mm)	95
Height (mm)	113
Weight (g)	1200
IP rating	IP 20
Finishing colour	White RAL9016


Type of finishing	Polyester powder coated, Polyester powder coated
Body material	Aluminum, Aluminum
Diffuser material	Tempered glass
Maximal working temperature	+55° C
Minimal working temperature	-20° C

Electrical data

Nominal power (W)	33
Power factor	> 0,9
Power supply	220/240V 50/60Hz
Ballast	Integrated, Integrated
Insulation class	II

Dimmable	No
Quantity per package	1
Total quantity per boxing	10

Photometry

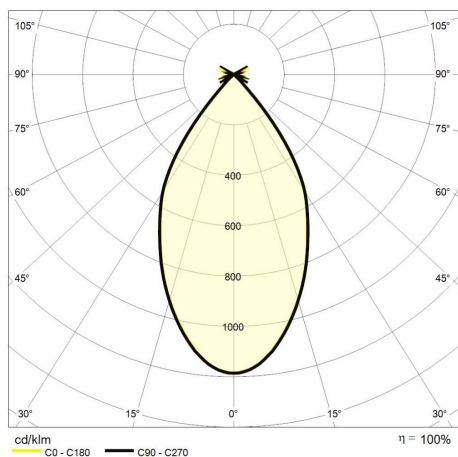

Technical drawing

